


# HEADER PACK

Easier & Economical

**Compact!**

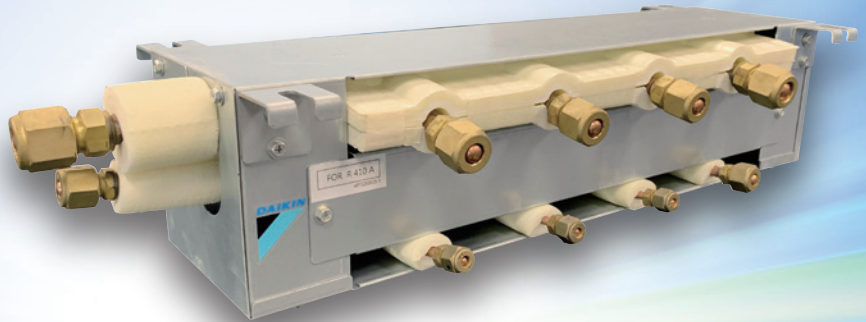

**Quick!**

**Easy!**

Installation time saving  
**1/3 of conventional**

Easy to install  
**No brazing work**


Safety  
**No fire in the building**

Space saving  
**Low silhouette  
only 14cm height**


# Simple & Quick !

Suitable luxurious residence


Connectable up to 4 & 6 IDU




**Connect by  
DGT or  
flare**



**Quick,  
flare nut  
connection**



**No need  
of brazing**

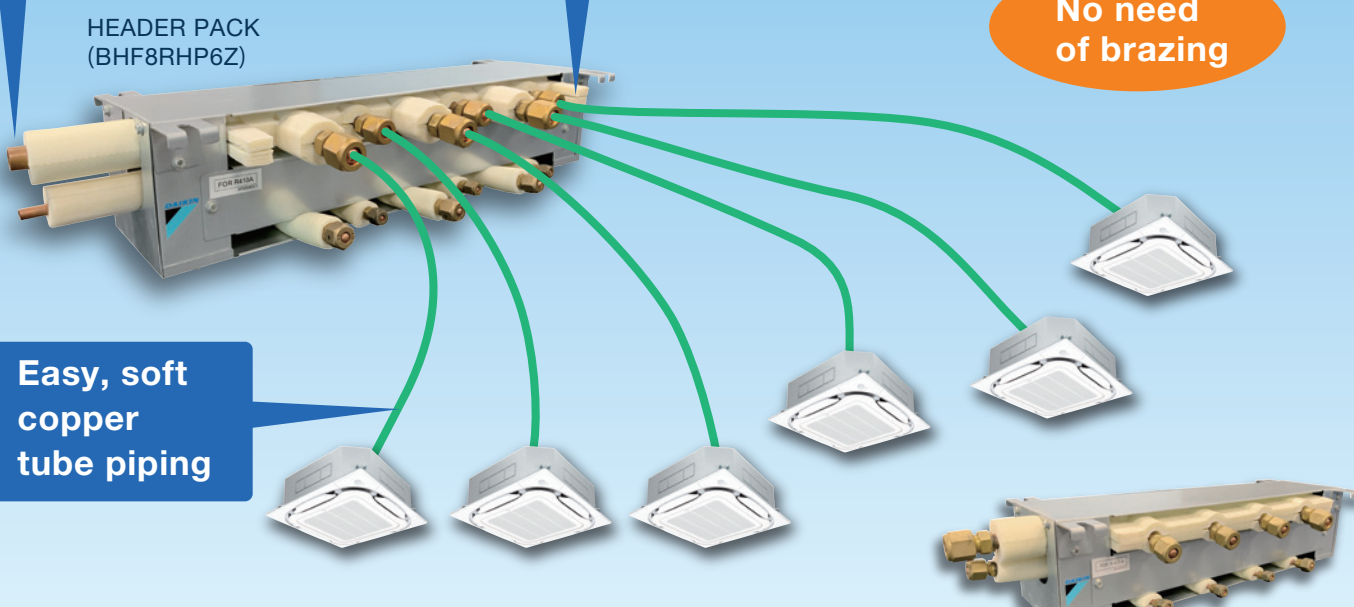


HEADER PACK (BHF8RHP6Z)

Easy, soft copper tube piping

(BHF6RHP6Z)

## Connecting 6 IDUs without Refnets

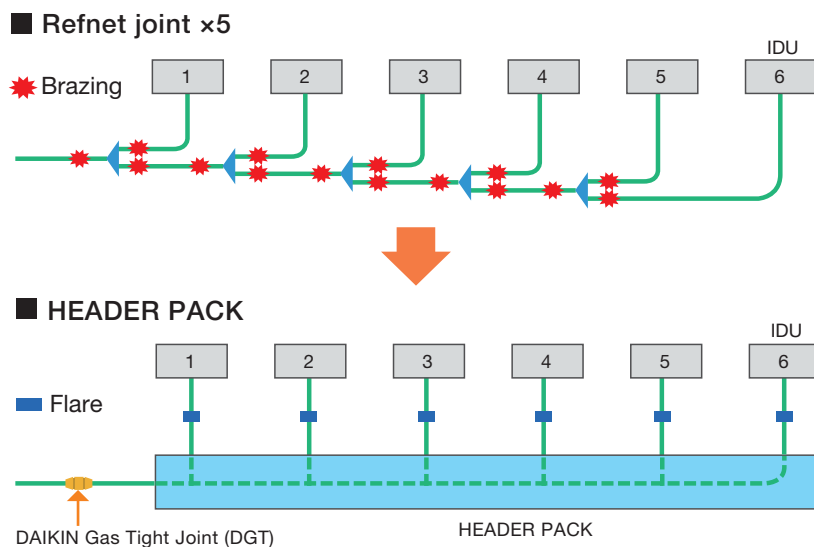


### Comparison of methods


Item		Refnet joint	HEADER PACK
Optional kit	Refnet joint	5	0
	HEADER PACK	0	1
Auxiliaries	Gas	Yes	No
	Brazing lod	Yes	No
	Elbow	Yes	No

# Installation examples


## ■ Piping length limitation

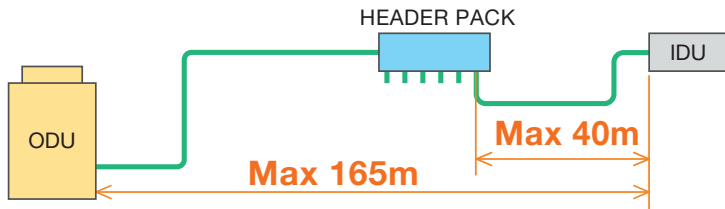

## ■ Parallel installation

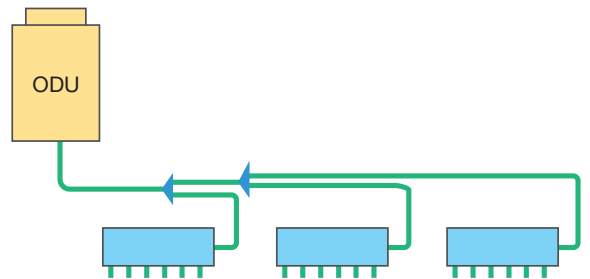

## ■ Mixed connection

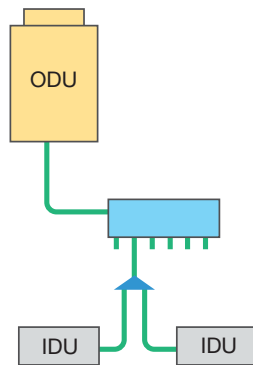


**Never place Refnet  
down stream**

## HEADER PACK Lineup


HP (VRV System)	HEADER PACK Model	Outdoor unit side		Indoor unit side (Flare)		Indoor unit total capacity index	Dimension (mm)			
		Liquid / Gas (mm)		Port	Liquid / Gas (mm)		H	D	W	
6	BHF6RHP6Z	9.5 / 15.9 (Flare)		4	Large x1 Small x3	Φ9.5 / Φ15.9 Φ6.4 / Φ12.7	< 150	135	143	559
<b>NEW</b> 6	BHF6ARHP6Z	9.5 / 15.9 (Flare)		6	Large x2 Small x4	Φ9.5 / Φ15.9 Φ6.4 / Φ12.7	< 150	135	143	623
6·8	BHF8RHP6Z	9.5 / 19.1 (DGT)		6	Large x3 Small x3	Φ9.5 / Φ15.9 Φ6.4 / Φ12.7	< 200	135	143	623
10	BHF10RHP6Z	9.5 / 22.2 (DGT)		6	Large x3 Small x3	Φ9.5 / Φ15.9 Φ6.4 / Φ12.7	< 290	135	143	623
12·14·16	BHF16RHP6Z	12.7 / 28.6 (DGT)		6	Large x3 Small x3	Φ9.5 / Φ15.9 Φ6.4 / Φ12.7	< 420	135	143	623

## Top view

### ■ BHF6RHP6Z

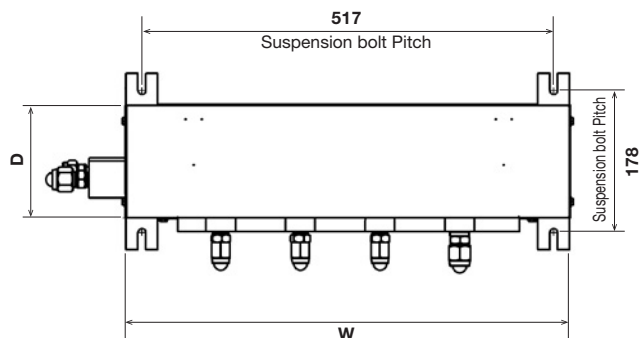

### ■ BHF6ARHP6Z, BHF8/10/16RHP6Z

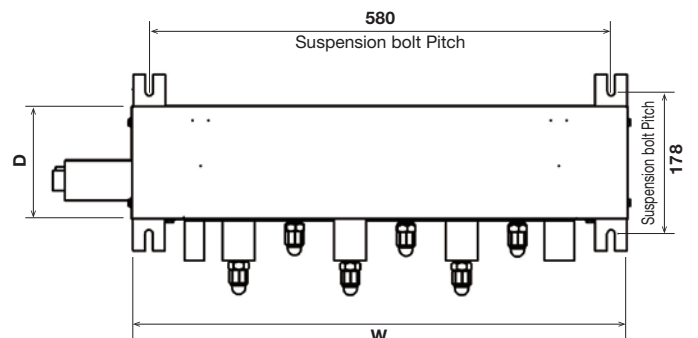


# Application examples

## Residence

### Shortest piping route


- DAIKIN Gas Tight Joint (DGT)
- Precision Piping Method (PPM)
- Soft copper tube

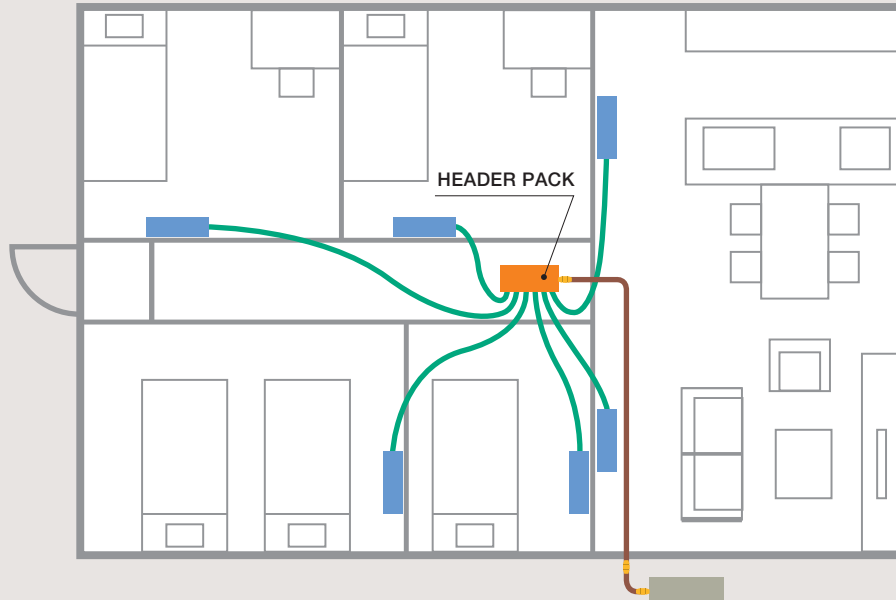

## Office

### Optimum combinational HEADER PACK and Refnets allows quick installation

- DAIKIN Gas Tight Joint (DGT)
- Precision Piping Method (PPM)
- Soft copper tube

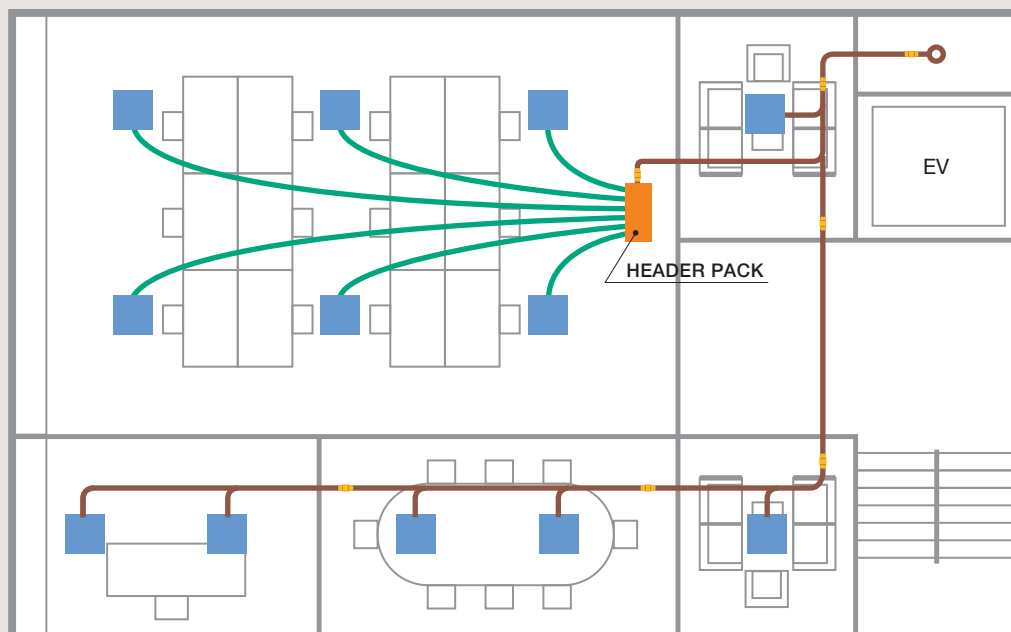

**DAIKIN INDUSTRIES, LTD.**

• Specifications, designs and other content appearing in this brochure are current as of January 2020 but subject to change without notice.

HP(2020.01.200)ADSP